




Weiler Labeling Systems

*Customer listening... Customized thinking*

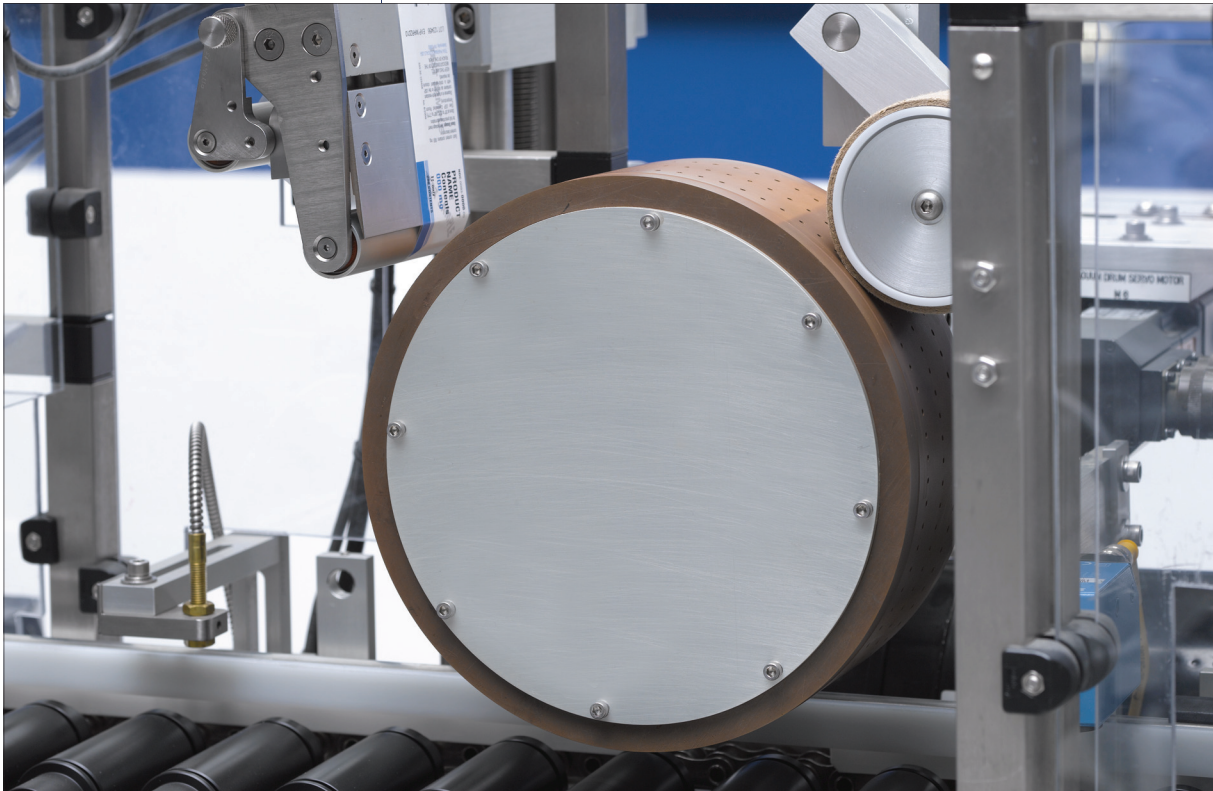

Designed for the application of a film or paper pressure sensitive label onto round containers and medical devices, the WLS **HR** in-line labeler combines a modular platform with a horizontal roller track design that references the container sidewall for consistent and precise label application. The **HR** fully synchronized electronic drive train also allows for ease of operation and fast changeovers via HMI-based recipe control. This construction ensures years of trouble-free operation at highest efficiency levels with minimal maintenance requirements.

The **HR** can be configured with a variety of options such as single or redundant label heads, label coding and inspection including serialized codes, patented Reconciler feature, Assurance labeling, and 21CFR Part 11 and CE compliance. The WLS patented Reconciler removes, counts and rewinds rejected labels prior to their application onto a container. The WLS Assurance labeling holds a container until a good label is available making sure that every container is properly labeled.

Backed by WLS' reputation of quality, impeccable service and customer care, and industry leading extended warranty coverage, the **HR** is built to meet the most challenging labeling demands.

1256 North Church Street  
Moorestown, NJ 08057 USA  
+1 856 273 3377  
+1 856 231 9883 fax  
sales@weilerls.com  
[www.weilerls.com](http://www.weilerls.com)

**HR**  
**Horizontal Roller**  
**In-Line Labeler**  
Ultra-High Speed, Precise Labeling



HR

## Horizontal Roller In-Line Labeler


### SALES AND SERVICE

WLS Sales and Service assures responsive and comprehensive technical assistance in solving your labeling application problems, servicing your WLS equipment, and providing a full line of compatible systems supplies.

### SPECIFICATIONS

- Container Type:
  - Round glass, metal or plastic
  - Cylindrical medical devices
- Container Diameter:
  - 3/8" (10mm) to 5" (127mm) \*
- Container Maximum Length:
  - 8" (203mm) \*
- Speed:
  - Up to 1200cpm
- Label Accuracy Range:
  - Horizontal Position: Dependent on label roll slitting accuracy
  - Skew: Dependent on sidewall vertical accuracy

\* Unique shapes upon request

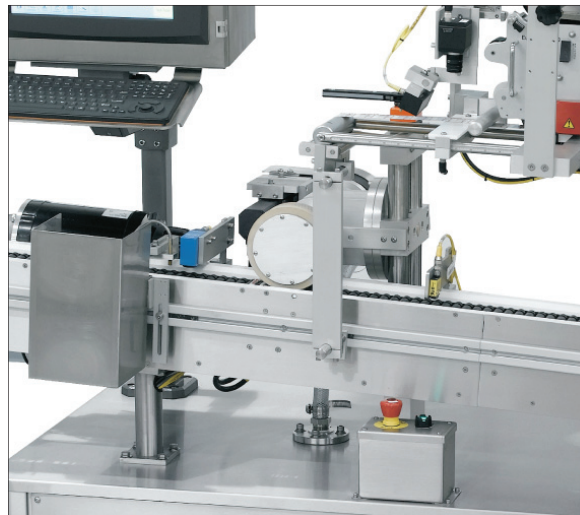

### FEATURES

- Left hand or right hand discharge
- cGMP compliant construction
- Stainless steel clad base
- Cat 3 or better guarding
- Synchronized servomotor-driven roller track, and vacuum drum drives
- Vacuum drum label dispenser (for continuous high-speed web handling)
- Reject station
- Boom mounted, user-friendly and password protected HMI
- Positive track and reject
- No proprietary electronics

### OPTIONS

- Container tooling
- LA-2000 label applicator
- Integration of all major code printing (thermal ink jet, thermal ribbon and laser) and vision inspection brands
- Serialization capable (for label code)
- Patented Reconciler (for automatic rejected label removal & tracking)
- Assurance labeling (to ensure every container is properly labeled)
- OEE (Overall Equipment Effectiveness) and other custom HMI screens
- Data collection
- Remote Ethernet access (for long distance diagnostics)
- 21CFR Part 11 compliance
- FAT/DDS/IQOQ documentation
- UL, seismic and CE certification