



Weiler Labeling Systems

Customer listening... Customized thinking



Designed for the application of a film or paper pressure sensitive label at higher speeds or onto larger containers, the WLS **RLW-760** wash down rotary labeler combines a larger robust modular platform with air-actuated top hold, and cam-activated or motor driven product rotation. This design ensures years of trouble-free operation at highest efficiency levels with minimal maintenance requirements. The **RLW-760** is designed and built to IP-25 standards for Food & Beverage labeling applications. The **RLW-760** comes with an enhanced zero-access guarding package, meeting the most stringent safety standards.

The **RLW-760** can be configured with a variety of options such as single or redundant label heads, as well as label coding and inspection.


The **RLW-760** is the latest update in our long history of robust machine designs. Backed by WLS' reputation of quality, impeccable service and customer care, and industry leading extended warranty coverage, it is built to meet the most challenging labeling demands.

1256 North Church Street
Moorestown, NJ 08057 USA
+1 856 273 3377
+1 856 231 9883 fax
sales@weilerls.com
www.weilerls.com

RLW-760 **Wash Down Rotary Labeler** Higher-Speed, Precise, Wash Down Labeling



RLW-760 Wash Down Rotary Labeler

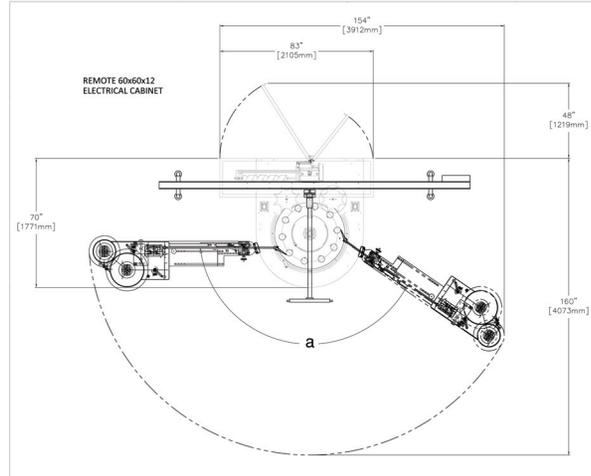

SPECIFICATIONS

- Container Type: Glass, metal or plastic – Round, oval, rectangular or compound angles
- Label Accuracy range:
 - Vertical Position: Dependent on label roll slitting accuracy
 - Skew: Dependent on sidewall vertical accuracy
 - Placement: Dependent on application

	RLW-760			
Turret Diameter	30" (762mm)			
Platforms	12	16	20	24
Driven Platform Option	x	x	x	x
Max. Speed (cpm) * * Dependent on label size	480	640	800	960
Max. Container Size (major axis / width)	6" (152mm)	4" (101mm)	3" (76mm)	2.5" (63mm)
Max. Container Size (minor axis / depth)	5.5" (140mm)			
Max Container Height	13.5" (342mm)			

SALES AND SERVICE

WLS Sales and Service assures responsive and comprehensive technical assistance in solving your labeling application problems, servicing your WLS equipment, and providing a full line of compatible systems supplies.

FEATURES

- Left hand or right hand discharge
- Stainless steel clad base
- IP-25 wash down standard (low pressure jets of water from all directions - limited ingress permitted)
- Raised-bed stainless steel conveyor
- Zero-access Cat 3 or better guarding
- Synchronized servomotor-driven feedscrew, machine and conveyor drives
- Continuous-motion capability
- Multi-shape container capability
- Tool-less quick changeover
- Boom mounted, user-friendly and password protected HMI
- Positive track and reject
- No proprietary electronics

OPTIONS

- Color-marked container tooling
- Recessed product platforms (for compound angle containers)
- Motorized container height adjustment
- Motor driven product platforms
- Container orienting prior to labeling
- Vacuum soft-reject star wheel
- X-3 or X-4 label head
- Integration of all major code printing (thermal ink jet, thermal ribbon and laser) and vision inspection brands
- OEE (Overall Equipment Effectiveness) and other custom HMI screens
- Remote Ethernet access (for long distance diagnostics)
- UL, seismic and CE certification